



Model Numbers

IHEG-36
 IHEG-48
 IHEG-60
 IHEG-72



Thick highly polished steel griddle plate maintains selected temperatures.



Extra large capacity grease drawer removes for cleaning.



IHEG-36 shown with optional stand with casters

BURNERS - Ideal for high production applications.

- Electronic thermostat controls maintain selected griddle temperature during peak cooking periods.
- Controls are located every 12" (305 mm) and have a 550° F (288° C) maximum temperature.
- Automatic electronic ignition system for energy savings. Light indicates when pilots and power are "ON".
- Internal design features direct the heat evenly throughout the entire surface of the griddle plate, eliminating any cold zones.
- Stainless steel burners are rated at 15,000 BTU/hr (4 KW) ea. Burners are located every 6" (152 mm).

GRIDDLE PLATE - Full 24" (610 mm) plate depth for more cooking surface.

- Highly polished 1" (25 mm) thick steel plate holds temperature and has a quick recovery.
- Optional chrome griddle top is available.


GREASE MAINTENANCE - 4" (102 mm) wide stainless steel grease gutter with fully welded grease chute.

- Extra large capacity grease drawer(s) removes easily.
- 72" (1829 mm) model includes 2 grease drawers.

EXTERIOR - Stainless steel front, sides, splash guard, and ledge.

- Constructed of heavier stainless steel and designed to withstand the busiest and harshest kitchen environments.
- Stainless steel ledge is one piece rolled for cleaning convenience.
- 4" (102 mm) chrome plated legs are included.
- One year parts and labor warranty.



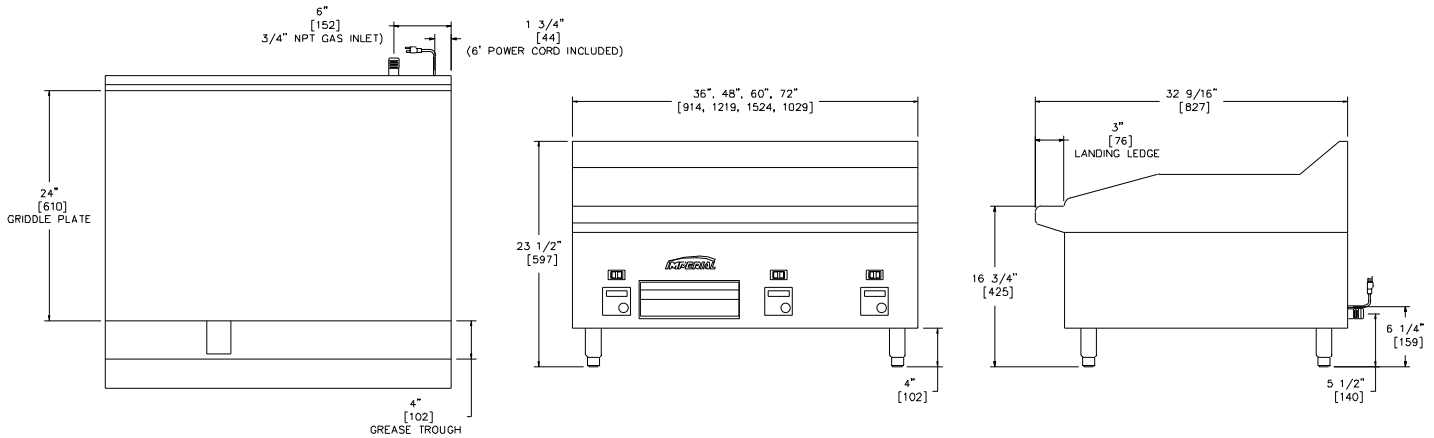

HIGH EFFICIENCY | HIGH PRODUCTION GRIDDLE

MODEL	WIDTH	NUMBER OF BURNERS	GAS OUTPUT		SHIP WEIGHT	
			BTU	(KW)	(KG)	LBS
IHEG-36	36" (914 mm)	6	90,000	(26)	(230)	506
IHEG-48	48" (1219 mm)	8	120,000	(35)	(305)	673
IHEG-60	60" (1524 mm)	10	150,000	(44)	(383)	845
IHEG-72	72" (1829 mm)	12	180,000	(53)	(462)	1018

Measurements in () are metric equivalents.

MODEL	GRIDDLE PLATE DIMENSIONS	OVERALL DIMENSIONS	CRATED DIMENSIONS
IHEG-36	36" w x 24" d (914 x 610 mm)	36" w x 32-9/16" d x 23-1/2" h (914 x 827 x 597 mm)	38-1/2" w x 36" d x 26" h (978 x 914 x 660 mm)
IHEG-48	48" w x 24" d (1219 x 610 mm)	48" w x 32-9/16" d x 23-1/2" h (1219 x 827 x 597 mm)	50-1/2" w x 36" d x 26" h (1283 x 914 x 5660 mm)
IHEG-60	60" w x 24" d (1524 x 610 mm)	60" w x 32-9/16" d x 23-1/2" h (1524 x 827 x 597 mm)	62-1/2" w x 36" d x 26" h (1587 x 914 x 660 mm)
IHEG-72	72" w x 24" d (1829 x 610 mm)	72" w x 32-9/16" d x 23-1/2" h (1829 x 827 x 597 mm)	74-1/2" w x 36" d x 26" h (1892 x 914 x 660 mm)

MANIFOLD PRESSURE		MANIFOLD SIZE
NATURAL GAS	PROPANE GAS	
5.0" W.C.	10.0" W.C.	3/4" (19 mm)

Specify elevation, if over 2,000 ft.

CLEARANCE REQUIREMENTS

For use only on non-combustible floors. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

AMPERAGE REQUIREMENTS			TOTAL
VOLTS	PHASE	HZ	AMPS
120	1	60/50	2

OPTIONS AND ACCESSORIES

- Casters for Stainless Steel Stands, set of 4
- 60" and 72" (1524, 1829) models, set of 6
- 7" (178 mm) deep Front Landing Ledge
- 9" (229 mm) deep Front Landing Ledge
- Chrome Griddle Top (Add "CG" to model #)

