



1/2 SIZE CONVECTION OVEN ELECTRIC TURBO-FLOW

IMPERIAL®

Model Numbers
HSICVE-2



Turbo-Flow System provides even temperatures throughout the oven cavity.



Oven interior is porcelainized for easy cleaning.



HSICVE-2 shown with optional casters

TURBO-FLOW SYSTEM - This system assures even cooking throughout the entire oven.

- Creates an air flow that circulates the air throughout all interior surfaces of the oven cavity.
- Recirculates hot air to maximize efficiency for energy savings.
- Fast temperature recovery.
- 1/4 hp fan motor for high production cooking and delicate baking.
- 1-speed oven cool down feature.
- 2 Electrical outputs are available for this model, 5 and 7.5 KW per oven. Please specify when ordering.

OVEN FEATURES - Porcelainized oven interior for easy cleaning and provides better browning.

- Coved oven cavity corners clean easily and quickly.
- Interior oven light is controlled by a momentary switch outside the oven.
- Large window for viewing product at a glance.
- 4 oven racks included with 8 rack guide positions for maximum versatility.
- Easily removable rack guides provide open access for cleaning.

HEAVY DUTY DOOR SYSTEM - Extends the life of the door and eliminates side-to-side shaft movement.

- Bearings on top and bottom of the door.
- Door locking mechanism.
- Door chassis is fortified to withstand constant opening and closing.
- Handle is secured to an internal stainless steel chassis system, not to the external door finish.




EXTERIOR FEATURES - Stainless steel sides, top and legs are standard.

- Manual and programmable control panels are available.



1/2 SIZED CONVECTION OVEN ELECTRIC TURBO-FLOW

IMPERIAL®

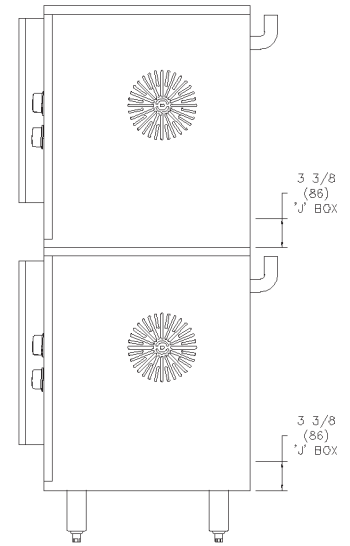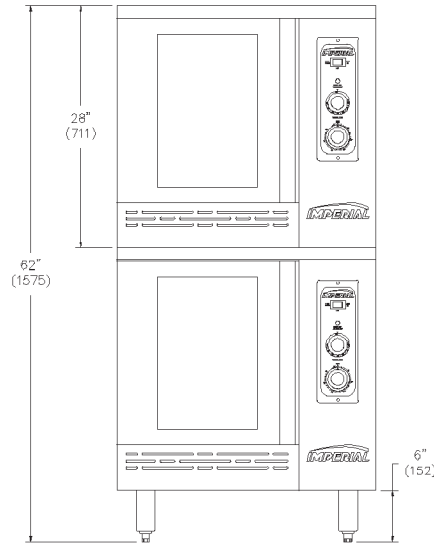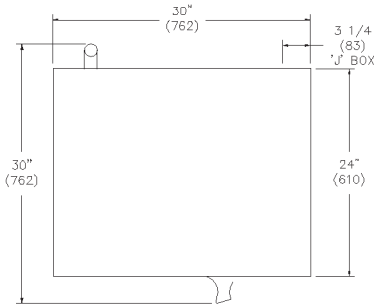

| MODEL | DESCRIPTION | TOTAL OUTPUT | SHIP WEIGHT | |
|----------|----------------------|--------------|-------------|-----|
| | | KW PER OVEN | (KG) | LBS |
| HSICVE-2 | 1/2 size Double Oven | 5 | (215) | 474 |
| HSICVE-2 | 1/2 size Double Oven | 7.5 | (215) | 474 |

Measurements in () are metric equivalents.

| MODEL | DIMENSIONS | CRATED DIMENSIONS |
|----------|---------------------------------------------|---------------------------------------------|
| HSICVE-2 | 30" w x 30" d x 62" h (762 x 762 x 1575 mm) | 32" w x 32" d x 60" h (813 x 813 x 1524 mm) |

ELECTRICAL REQUIREMENT PER OVEN

| TOTAL KW | VOLTS | PHASE | HERTZ | AMPS |
|--------------|-------|-------|-------|-------------|
| 5 per oven | 208 | 1 | 50/60 | 32 per oven |
| 5 per oven | 208 | 3 | 50/60 | 21 per oven |
| 5 per oven | 240 | 1 | 50/60 | 28 per oven |
| 5 per oven | 240 | 3 | 50/60 | 20 per oven |
| 5 per oven | 480* | 3 | 50/60 | 14 per oven |
| 7.5 per oven | 208 | 1 | 50/60 | 44 per oven |
| 7.5 per oven | 208 | 3 | 50/60 | 28 per oven |
| 7.5 per oven | 240 | 1 | 50/60 | 39 per oven |
| 7.5 per oven | 240 | 3 | 50/60 | 26 per oven |
| 7.5 per oven | 480* | 3 | 50/60 | 17 per oven |

EXTERIOR

- Stainless steel exterior, except back. Reflects a quality, professional look for exhibition cooking
- Welded and finished seams
- Stainless steel legs
- Easy to clean and maintain
- One year parts and labor warranty

CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters; or 2 1/4" (57 mm) overhang is required when curb mounted. 0" clearance from non-combustible side and rear walls. Provide 6" (152 mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.



Manual Controls

- Manual controls are standard
- Independent time and temperature controls provide maximum versatility for general baking and roasting
- 1-speed fan switch

Thermostatic oven control

- Snap Action temperature control 150° F to 550° F. (66° C to 260° C)

On-Off switch Timer

- 60 minute manual timer
- Audible buzzer lets you know when the cooking cycle is complete

Programmable Controls available as an option

OPTIONS AND ACCESSORIES

- Cook and Hold Feature
- Heavy Duty Casters, set of 4
- Stainless Steel solid door, must specify at ordering
- Extra Racks
- 480 volts



IMPERIAL®

E-22 7/16

© 2016 Imperial Commercial Cooking Equipment

Printed in the U.S.A.

1128 Sherborn Street Corona, CA 92879
800.343.7790 Ph: 951.281.1830 Fx: 951.281.1879
www.imperialrange.com
E-mail: imperialsales@imperialrange.com